


- ORGANIC TOPSOIL WITH SEED APPLIED
- POROUS BACKFILL
- UNTREATED BUILDING PAPER OR GEOTEXTILE FABRIC
- 75mm DIA. OR 100mm DIA. PERFORATED DISTRIBUTION PIPE
- STONE TO BE 19mm CLEAR AGGREGATE, WASHED TO BE FREE OF FINE MATERIAL



- NOTES :**
1. DISTANCES MUST BE INCREASED AS IN O.B.C. §.7.4.2 (9) AND §.2.1.4.(2) WHERE A RAISED BED IS USED OR THE "T" TIME IS LESS THAN 10.
  2. SURFACE DRAINAGE SHALL BE DIRECTED AWAY FROM THE LOCATION OF A WATER SUPPLY WELL OR SEPTIC TANK DISPOSAL.
  3. PROVIDE VERIFICATION OF "T" TIME OF NATIVE OR IMPORTED SOILS USED FOR SEPTIC BED & MANTLE.

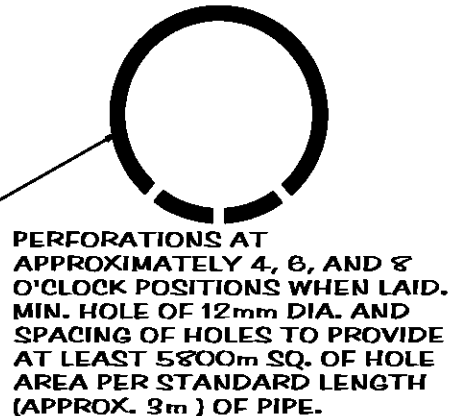

DETAIL  
**SEWAGE SYSTEM**  
 LEACHING BED CLEARANCES  
 & TRENCH DETAILS

PERMIT APPLICATION #	REVIEWED BY:
	DATE:

DWG. NO.
X05
01-05 00